


1  
2  
3  
4  
5



(mm)

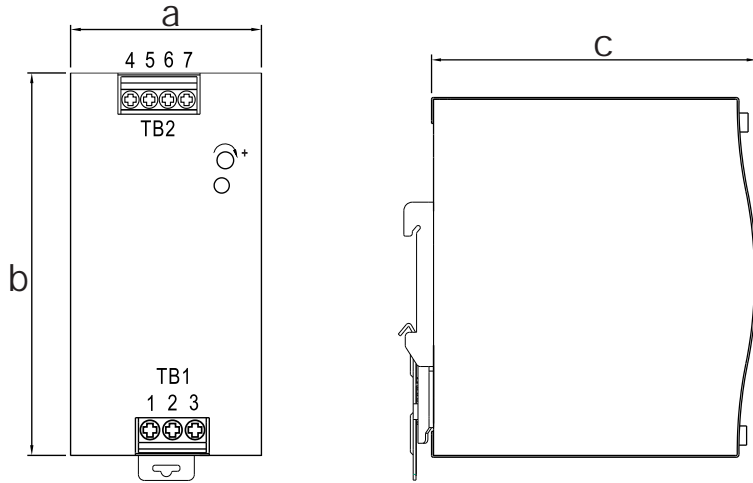

	a	b	c
NDR- 75	32	125. 2	102
NDR- 120	40	125. 2	113. 5
NDR- 240	63	125. 2	113. 5

NDR- 75- 24      500  
NDR- 75- 24      EDR

75W      24V

500

4



**产品合格证**

GB 4943.1  
符合标准: GB 17625.1

检验员: 02

出厂日期: 见产品或包装

本产品经检验合格, 准予出厂。

**C-lin** 欣灵电气股份有限公司  
XINLING ELECTRICAL CO., LTD.

**C-lin** 欣灵

使用说明书  
Products Instructions

NDR

**C-lin**  
欣灵电气股份有限公司  
XINLING ELECTRICAL CO., LTD.  
地址: 浙江省乐清经济开发区纬十九路328号  
电话: 0577-62735555 传真: 0577-62722963  
Http://www.c-lin.cn E-mail:xl@xinling.com  
技术咨询: 400-8236775




29A005E1

3

NDR

NDR

AC220V AC110V



12V 24V  
75W 120W 240W


NDR

TB1

1	⊕
2	/N
3	/L

TB2

4 5	-V
6 7	+V



1 NDR-75( 75W ) NDR-120( 120W )

	NDR-75-12	NDR-75-24	NDR-120-12	NDR-120-24
	12V 0 6.3A	24V 0 3.2A	12V 0 10A	24V 0 5A
	100mVp-p	120mVp-p	100mVp-p	120mVp-p
	± 0.5%	± 0.5%	± 0.5%	± 0.5%
	± 0.5%	± 0.5%	± 1%	± 0.5%
	85.5%	88%	85.5%	88%
	12 14V	24 28V	12 14V	24 28V
	85 264VAC/120 370VDC 47 63Hz			
	20A/115VAC 40A/230VAC			
	105% 150%			
	121% 142%		120% 140%	
	1200ms 60ms 60ms/230VAC			
	1.5kV	1.5kV	0.5kV	1
	500VDC/100M			
	-20 +50			

2 NDR-240( 240W )

	NDR-240-24		
	24V 0	10A	
	150mVp-p		
	± 0.5%		
	± 1%		
	87.5%		
	24 28V		
	85 264VAC/120	370VDC 47	63Hz
	27A/115VAC	45A/230VAC	
	105%	150%	
	29 36V	24V	
	1500ms, 100ms / 230VAC		
	1.5kV	1.5kV	0.5kV 1
	500VDC/100M		
	-20	+50	

1

230VAC,

25

2

100MHz

12

0.1μ F/400V

4.7μ F/250V

3

4

EMC

5